




Live sound reinforcement Sub, used with mid/ high speaker for speech and vocals, music playback in entertainment, A/V, and institutional venues – especially when ease of use and portability are important factors.

Power and acoustic specifications			
Power	240v 50 Hz	Frequency response	36Hz - 130 Hz
Output	500w (1000w peak)	Max SPL	129dB
In/Out connections	3 pin XLR in and out	Speakers	18"woofer
Physical specifications			
Case	Plastic case	Size	569 x 652 x 617mm
Weight	14.9 Kg		

Input Panel

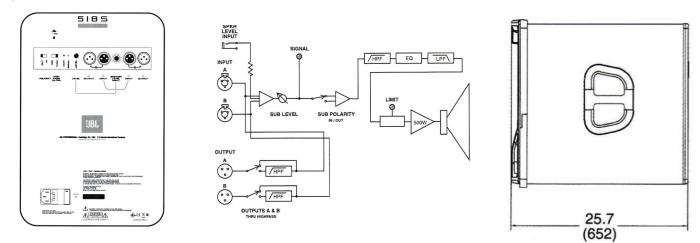

On Axis Frequency Response

